

517,461

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PRO

03 DEC 2004



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/004864 A1

(51) International Patent Classification⁷: **B01D 29/11,**
29/21

(21) International Application Number:
PCT/EP2003/006911

(22) International Filing Date: 30 June 2003 (30.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0208415 4 July 2002 (04.07.2002) FR

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **STEPHAN, Nol-**
wenn [FR/FR]; 9, rue de la Niederbourg, F-67400 Illkirch
(FR). **CHAVANNE, Sylvie** [FR/US]; 1226 Massachusetts
Avenue, Apartment 2, Arlington, MA 02476 (US).

(74) Agent: **SANTARELLI**; 14, avenue de la Grande-Armée,
B.P. 237, F-75822 Paris Cedex 17 (FR).

(81) Designated States (*national*): JP, US.

(84) Designated States (*regional*): European patent (AT, BE,
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).


Published:

— with international search report

(71) Applicant (*for all designated States except US*): **MILLI-**
PORE CORPORATION [US/US]; 290 Concord Road,
Billerica, MA 01821-3405 (US).

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FILTER CARTRIDGE

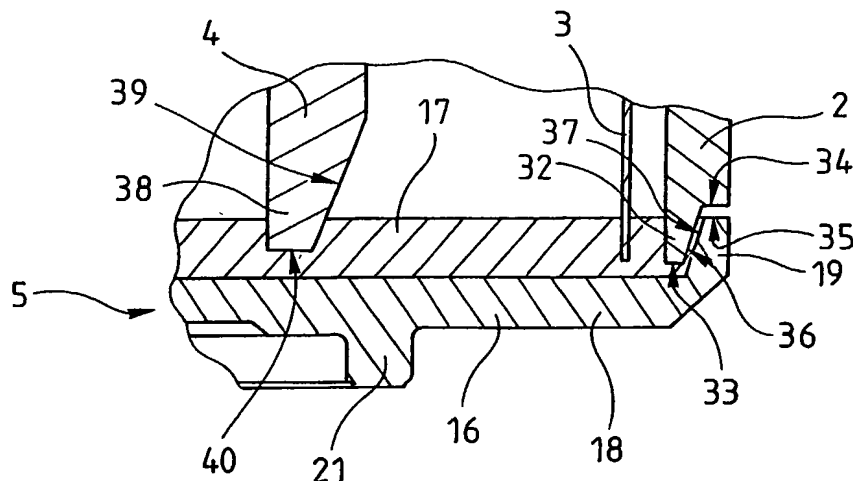

(57) Abstract: A filter cartridge which comprises a filter pack (3) formed by a flat filtering medium, a tubular sheath (2) with a perforated wall, surrounding the filtering pack, and two respective end caps (5) having a first disc (16) and a second disc (17) placed one on top of the other, each made from thermoplastic, with a portion of the filtering pack (3) situated along one of its edges and a portion of the sheath (2) situated along one of its edges (33) which are embedded in the second disc (17), with the first disc (16) having a peripheral rim (19) which surrounds the relevant portion of the sheath (2) and with the sheath having a shoulder (34) opposite the edge of the rim (19) of the first disc (16).



WO 2004/004864 A1